


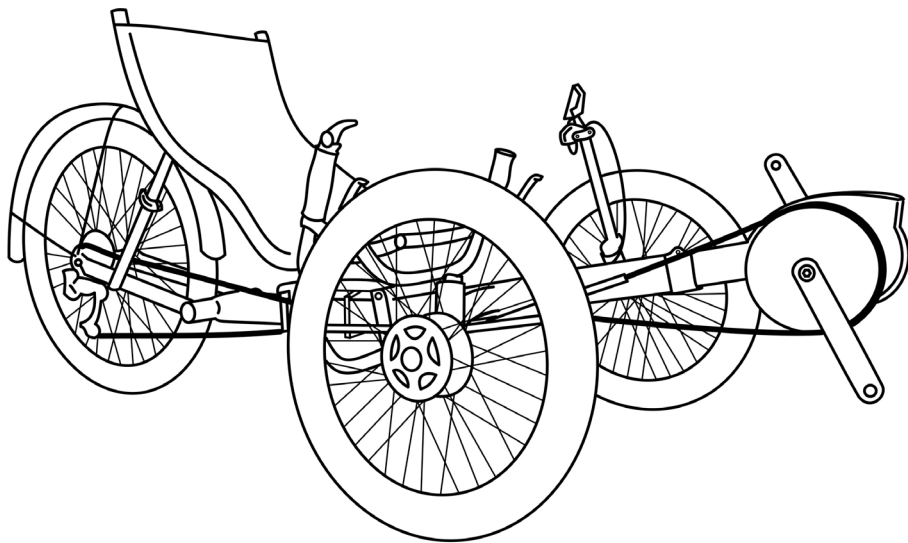

GreenSpeed e+

with Bosch Smart System

Build Notes

for 20" front wheels



Failure to match Boost Kit and the trike specifications it is programmed for could result in an error code, will cause the Boost Kit to operate improperly, and could void the warranty of the Boost Kit.


PLEASE NOTE

The 50T chainring is to be used with 20" rear wheel models - GT20 and 20-RS, Magnum SD and XL.
The 40T chainring is to be used with 26" rear wheel models - GT26 and Magnum BW.

Perform the following before installing the Bosch Boost Kit:


- Remove pedals from stock boom.
- Detach shift cable from front derailleur.
- Remove front derailleur.
- Remove left hand shifter assembly.
- Install end cap into handlebar.
- Break chain.
- Remove stock boom.

- 1 Using caution to not stress wires, insert boom to desired length and tighten boom clamp bolts to 12-13Nm.


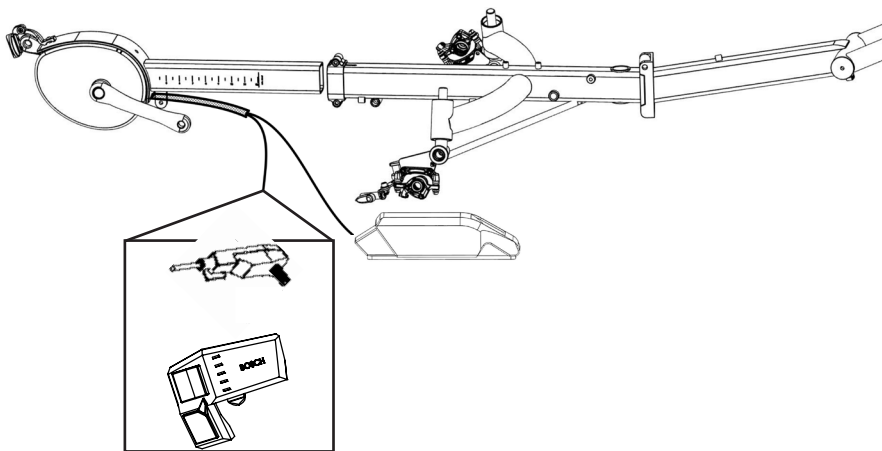


- 2 Remove battery from battery mount. Install battery mount onto frame, and reinstall battery.

Magnum Models:

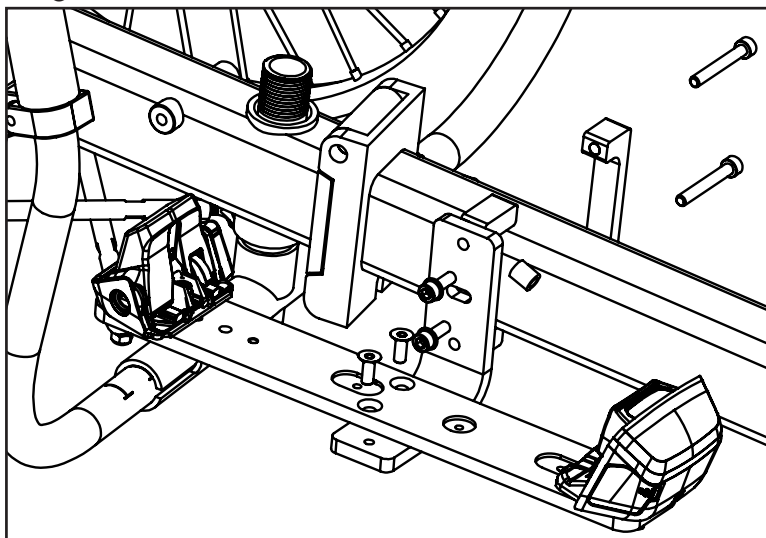


GT Models: The Clamp Shim must be installed on all GT's.

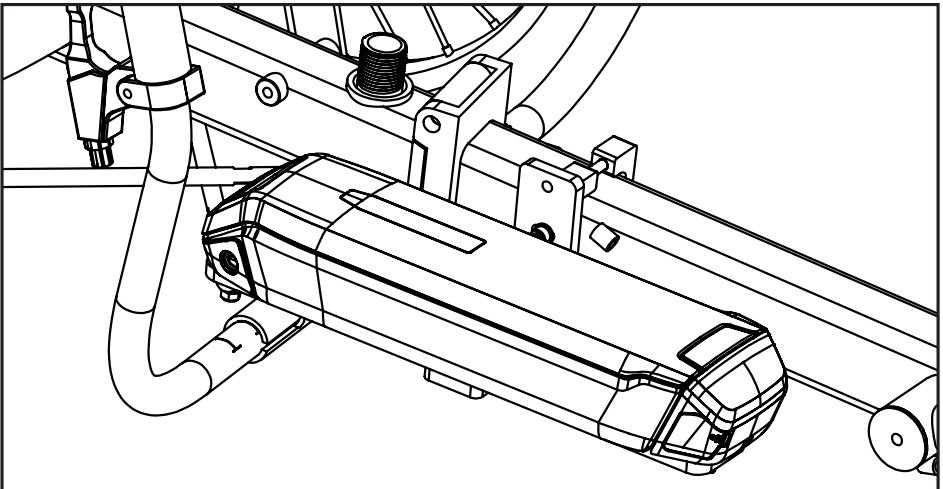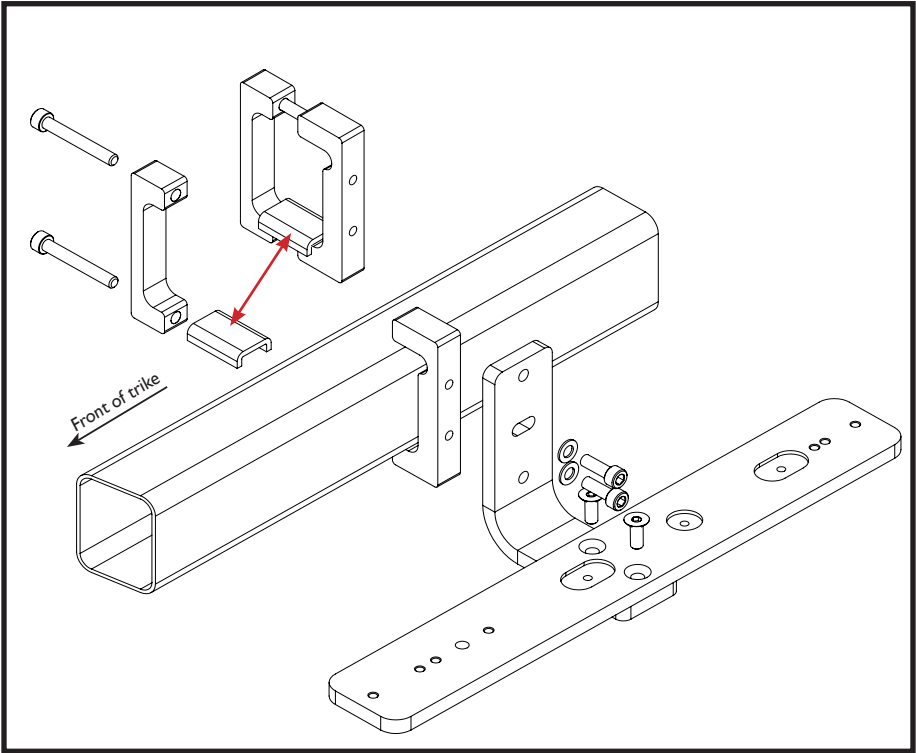


3

Install accessory mount and LED Remote onto handlebar. Refer to step 5 for wire routing.

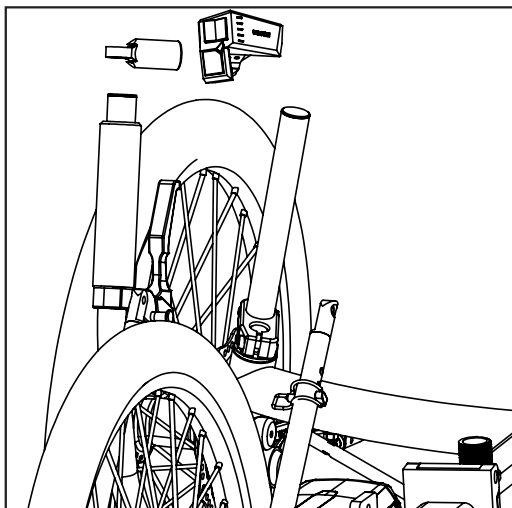

4


Install speed sensor and magnet on non-drive side of trike. Ensure wires are secure and clear of brake and steering components.

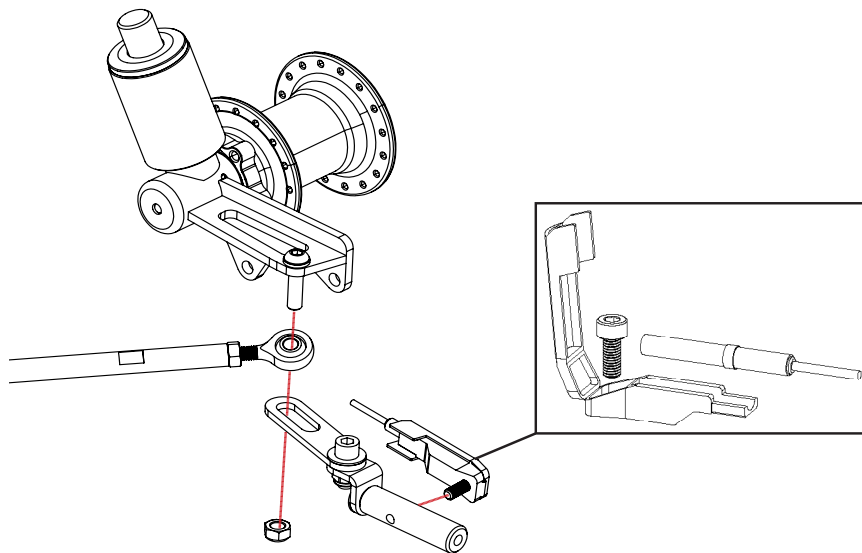


5

Recommended wire routing.

Note: Excess wire should be properly secured in the Wire Management Wrap (WMW), being careful not to stress or kink any wires. Placement of the WMW depends on user preference and clearance needs. Once the wires have been contained, secure the WMW to the mainframe.

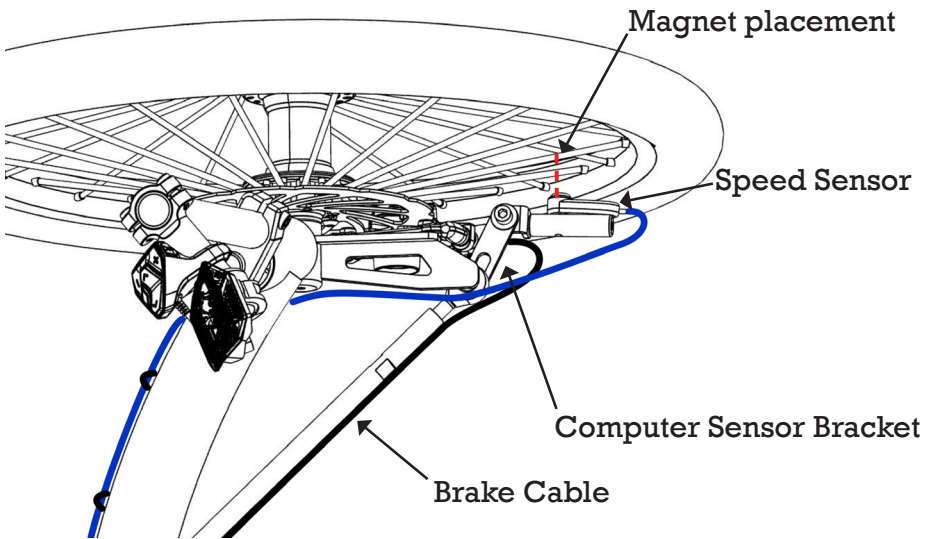


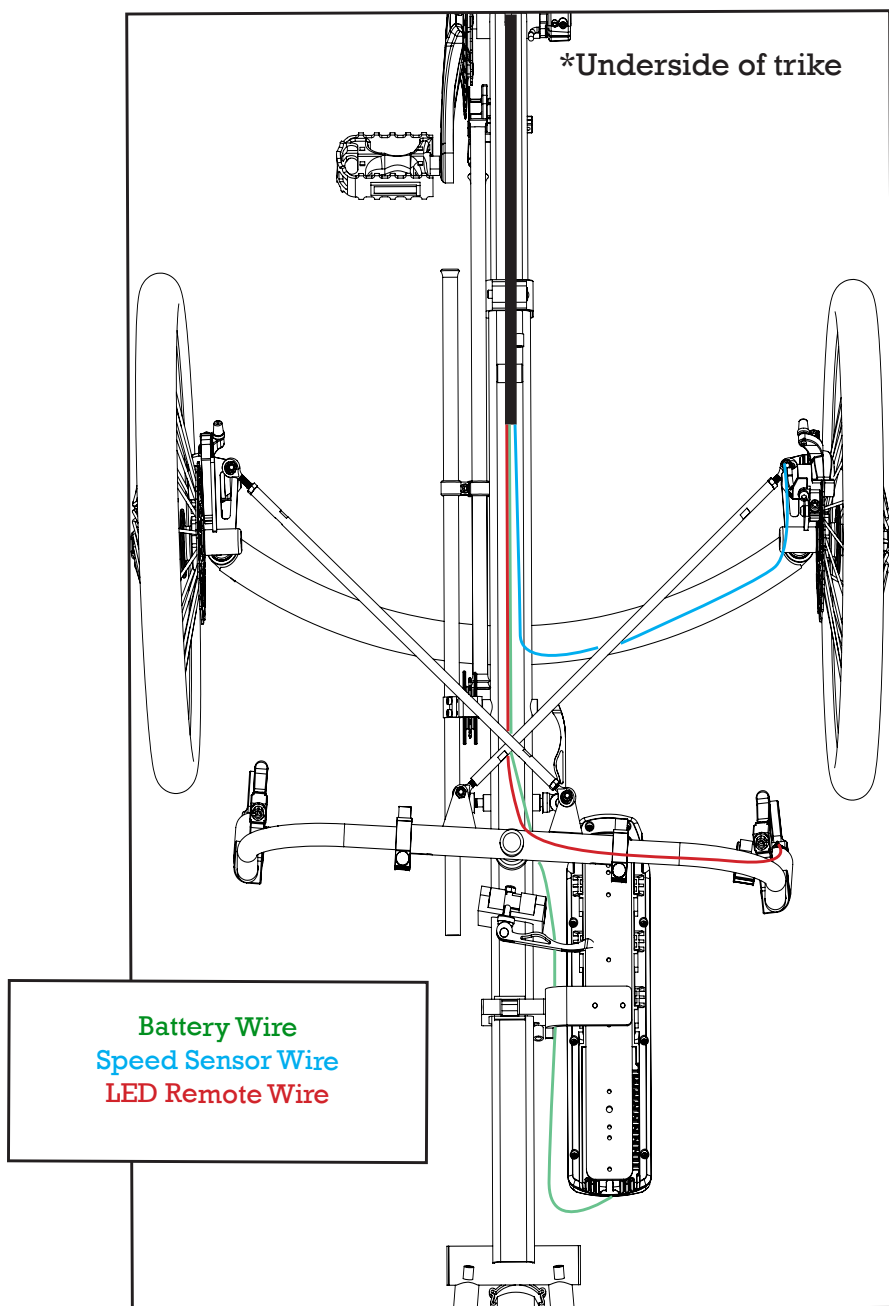

6


Remove the upper bearing from the headset. Apply grease to the pressed race and install the included Damper Bushing. Ensure the lower bearing is properly seated, and torque the threaded race to 7-9Nm. Snug the lock nut.

WARNING: Failure to match this specification will lead to adverse steering response and feel.

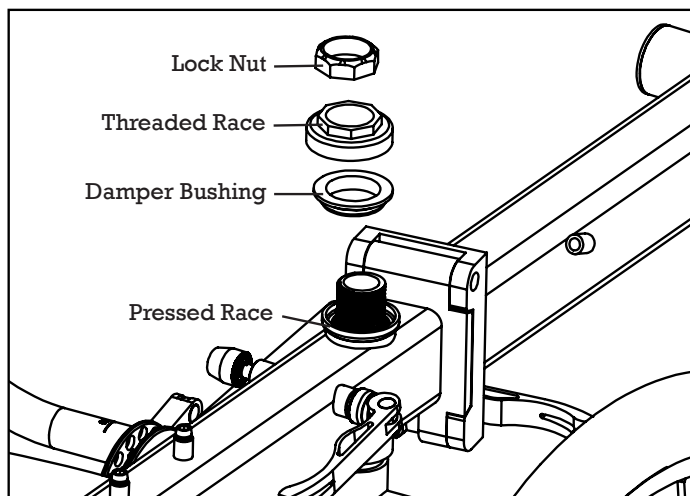

7

Affix the Class 1 E-bike sticker on top of the mainframe near the chainstays.

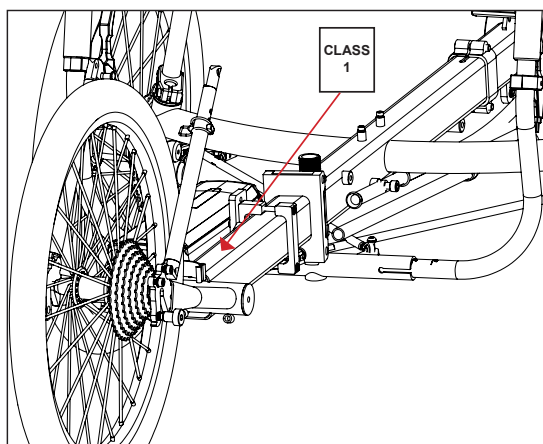

8

Final Checklist:

- Reinstall chain and pedals.
- Charge the battery pack completely.
- Secure the battery with the additional safety strap.
- Download the Bosch Flow App.
- Double check your work.
- Test ride the finished product.
- Additional manuals available here:
www.GreenSpeed-Trikes.com/Resources/Manuals

GreenSpeed

800.945.9910 | www.greenspeed-trikes.com
4460 40th St. SE | Grand Rapids, MI 49512 USA